

CONTROLLED RESPONSE
PERFORMANCE SYSTEM


CRP™

DIN/EN CERTIFIED
ANCHORED SYSTEM

CRP
CONTROLLED RESPONSE
PERFORMANCE SYSTEM

An Advanced DIN/EN-Compliant Anchored System.

- Designed to take the rigors of today's heavily-used facilities
- Anchored substrate/continuous channel option
- Consistent play and ball rebound
- Greater internal control and expansion/contraction characteristics
- Versatile applications

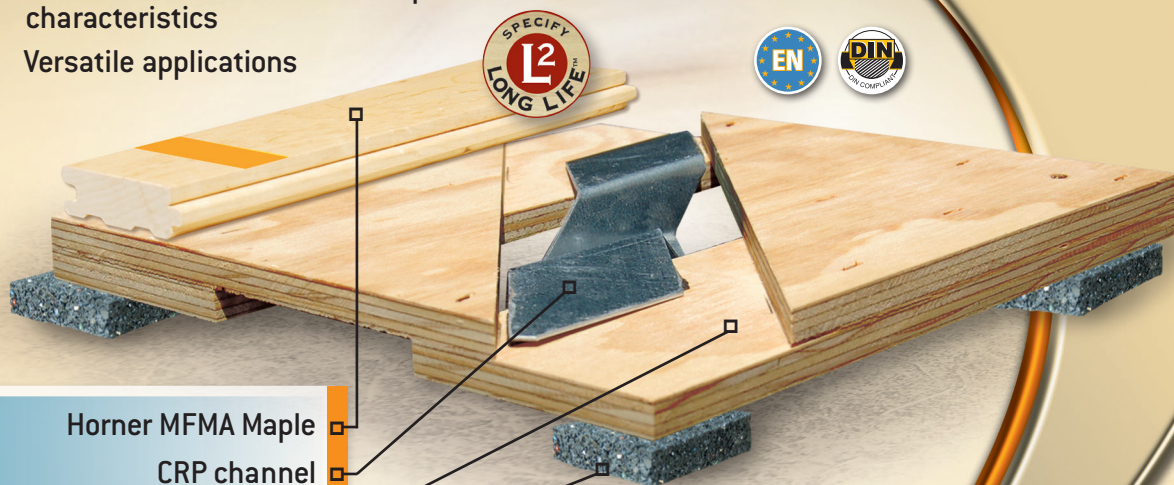

Horner MFMA Maple
CRP channel
Pre-engineered subfloor
7/16" ECO™ pad or
optional SAFE™ pad



LEED
Options Available

Field houses, competition and multipurpose
gymnasiums, collegiate, secondary schools
and heavy-use facilities.

PERFORMANCE

Meets or exceeds DIN18032-Part II / EN 1490-2006

PERFORMANCE CHARACTERISTICS

Shock Absorption	✓
Vertical Deflection	✓
Area of Deflection	✓
Ball Bounce	✓
Surface Friction (Coefficient of Friction/Sliding Coefficient)	✓
Rolling Load	✓

SPECIFICATIONS

System Thickness*/Pad Options

□ 25/32" MFMA Horner Maple:

2 1/8" Floor using 7/16" ECO Pad

2 3/8" Floor using 3/4" SAFE Pad

□ 33/32 MFMA Horner Maple: Add 1/4"

*System thickness is equivalent to slab depression for new facilities.

MATERIALS

Option: Specify Horner LongLife™ Maple

Subfloor: 15/32" rated manufactured panel or 7/16" OSB subfloor

16-gauge steel CRP restraints with concrete anchors

Concrete fastener/anchor

7/16" ECO pad. Option: 7/16" or 3/4" SAFE pad

Vapor retarder

GREEN/LEED OPTIONS

FSC Maple Flooring MRC 7

FSC Subfloor Components MRC 7 Exemplary Performance

Recycled ECO Pads MRC 4.1 & MRC 4.2

INSTALLATION REFERENCES

Lake Country Lutheran High School – Hartland, WI

University of Southern Indiana – Evansville, IN

Coopersville Middle School, Coopersville, MI

University of Saskatchewan – Saskatoon, Canada

University of San Diego – San Diego, CA



SPECIFY



For extended wear life, choose **Long Life™**. Horner's **Long Life™** flooring is 25/32" northern hard maple with the same wear depth as 33/32" flooring. **Long Life™** provides the ecological, cost savings and availability benefits of a 25/32" floor, with extended wear life. More re-sands, stronger system and economical. Why not value engineer?

HORNER FLOORING is the leading manufacturer of athletic flooring systems used in high-school gyms, college and professional arenas, and public and private training facilities.



Cert no. SW-COC-000220
© 1996 Forest Stewardship Council



Please contact us regarding our
extended maintenance warranty options.

Horner Flooring Company's policy is to continuously improve its line of products. Therefore, Horner Flooring Company reserves the right to change, modify or discontinue models, specifications and accessories of all products at any time without notice or obligation to any purchaser.

HORNER FLOORING COMPANY, INC.
800.380.0119 / www.hornerflooring.com

P.O. Box 380, 23400 Hellman Avenue, Dollar Bay, MI 49922
P: 906.482.1180 / F: 906.482.6115 / info@hornerflooring.com